




Automatic feeder

Model AFP6/AFP8

Pear

The automatic feeder, together with the peeler PL6/PL8, forms the complete automatic line for pears. The pears are loaded into a tank and from here they are singulated and transferred to an orientation station. In this station, the pears are orientated with the stalk down and placed in a hopper. In the final step, the pears are pushed from the funnels into the cups of the peeler. The electrical cabinet of the feeder is interfaced with the electrical cabinet of the connected peeler for synchronisation of the mechanisms.

The whole structure is positioned on a sliding carriage for easy access to the peeler during maintenance.

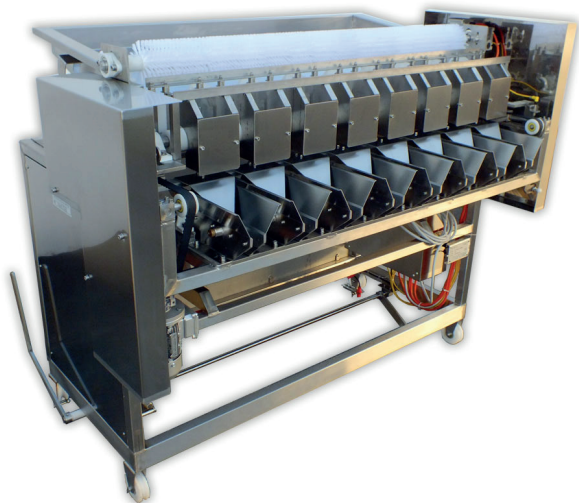

BRAND



We have the expertise




Automatic feeder

Model AFP6/AFP8
Pear

SPECIFICATIONS

	AFP6	AFP8
CAPACITY	60 pieces p/min	80 pieces p/min
OPERATORS	-	-
DIMENSIONS (LXWXH)	1800 x 1900 x 1900 mm	2000 x 1900 x 1900 mm
WEIGHT	650 kg	850 kg
POWER	1.4 kW	1.4 kW
AIR PRESSURE / CONSUMPTION	-	-
WATER PRESSURE / CONSUMPTION	-	-
FRUIT SIZE	Ø 60 - 90 mm	Ø 60 - 90 mm

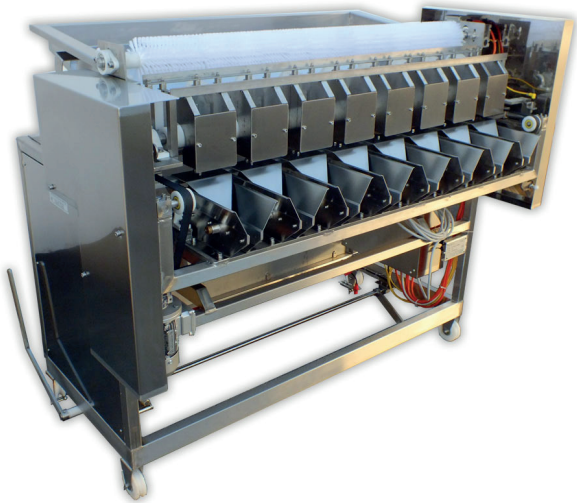

We have the expertise